

**ALLMARKDOOR**  
All Doors. All Docks. All Service. All the Time.

***Overcome*** Harsh  
Environments.

Pedestrian Doors

# Your Trusted Door Partner.

Allmark Door is a trusted industrial door partner focused on helping industry leaders keep facility operations in full-swing all-year-round.

When partnering with us you not only get high performance door and dock equipment—guaranteed to exceed the most rigorous safety standards—we also deliver turnkey solutions that make planning, implementing and maintaining your equipment needs simple!





# Content

## 1.0 Industrial-Grade Performance

### 1.1 High-Traffic Durability

## 2.0 Pedestrian Doors

- 2.1 Fiber-Tek
- 2.2 StrongDor SS
- 2.3 StrongDor FRP
- 2.4 StrongDor HM

## 3.0 Industries

- Food & Beverage
- Pharmaceutical
- Utilities
- Logistics & Distribution
- Heavy Industry
- Transportation

# 1.0 Industrial-Grade Performance



In accordance with Underwriter Laboratories (UL) fire protection standards.



Supports Food and Drug Administration (FDA) federal regulations.



Adheres to Good Manufacturing Practices (GMP) guidelines.



Complies with American National Standards Institute (ANSI) performance specifications.





# 1.1 High-Traffic Durability



Food processing and wash-down areas.



Commercial parking and automotive retail



Utilities, chemical and wastewater facilities.



Warehouse, distribution and logistics centers.



Manufacturing plants and refineries.



Transportation stations and hubs.



## 2.1 Pedestrian Doors

# FIBER-TEK™

Seamless Fiberglass Door and Frame

### Key Features

- Impervious, Corrosion-Resistant Fiberglass Panel
- Seamless Fiberglass-Reinforced Structural Joints
- Seamless Fiberglass-Reinforced Hardware Locations
- Composite Urethane Foam Core Material
- UL-Certified Fire-Rated Door Frame

### Major Benefits

- **Compliance-Proof:**  
Impervious fiberglass technology delivers extreme sanitation and corrosion-resistance in controlled environments.
- **Advanced Performance:**  
Guaranteed to withstand frequent washdowns and cleaning regimens using harsh chemicals.
- **Premium Durability:**  
Backed by a lifetime warranty against rotting, warping, peeling, and rusting under the harshest conditions.





# PRODUCT OVERVIEW

 [Get A Quote Now!](#)

## General Specifications

Sizes	Custom
Thickness	1 3/4" (44.5 mm) thick
Standard Core Material	Urethane foam
Core Assembly	Stiles and rails are securely bonded to core. 1 1/2" (38.1 mm) Square protruded fiberglass tubes. A polyester-based resin filled with 1/4" (6.35 mm) chopped glass strands and aerosil is used for reinforcements and corner blocks.
Core Material	End-grain balsa, honeycomb, or mineral core.
UL Approved	20 to 90-minute positive-pressure fiberglass doors and frames..

## Colors & Finishes


### Standard Colors

  
White


  
Beige


  
Standard Gray


  
Blue


  
Prime\*


### Special Colors


  
Lt. Yellow


  
Lt. Blue


  
Aqua


  
Royal Blue


  
Tan Green


  
Burnt Orange


  
Antiq. Brown


  
Dk Brown


  
Green


  
Forest Green


  
Brick Red


  
Burgundy


  
Light Gray


  
Medium Gray


  
Dark Gray

  
Dark Bronze

  
Safety Red

  
Safety Orange

  
Safety Yellow


  
Lt. Green

\* Polyurethane Primer (field painted by others)


25 colors available. Standard matte coat finish. A polyurethane finish in high sheen or low sheen is available upon request.

## Vision Panel and Louver Options


Factory installed vision panels and louvers ensure proper glazing materials are used to conform with fire and safety building codes.




Vision Panel  
10" x 10"  
254 x 254 mm




Vision Panel  
24" x 30"  
610 x 762 mm




Vision Panel  
5" x 20"  
127 x 508 mm



Vision Panel  
3" x 33"  
76.2 x 838 mm




Louvre Panel  
12" x 12"  
305 x 305 mm




Louvre Panel  
24" x 24"  
610 x 610 mm


## Door Glazing Options



Single glazing  
(standard)



Rabbetted single  
glazing (optional)



Sanitary flush double  
glazing (optional)

## 2.2

### Pedestrian Doors

# STRONGDOR™

SS Series

## Key Features

- Seamless Heavy-Duty Stainless Steel Panel
- Seamless Fully-Welded Stainless Steel Edges
- Steel Backing Plate Reinforced Hardware Locations
- High-Density EPS Bounded Core Material
- Fully-Welded and Polished Stainless Steel Frame

## Major Benefits

- Superior Strength:**  
Heavy-duty construction and fully-welded edges ensure ideal performance in aggressive industrial environments.
- Low Maintenance:**  
Tough steel parts and corrosion-resistant exterior is virtually unaffected by demanding interior or exterior applications.
- Premium Quality:**  
Smoothly polished finishes and custom accessories promote a sleek but durable appearance at all times.





### I General Specifications

Sizes	Up to 8' (2438mm) x 9' (2743mm). Additional sizes available in consultation with factory.
Panel Construction	<p>1 ¼" (44.5mm) thick 16-gauge, 304 #4 four-sided seamless stainless steel panel with high-density EPS bounded core.</p> <p>All hardware locations reinforced with internal steel backing plates.</p>
Frame Construction	<p>16-gauge, 304 #4 fully-welded and polished (through frame faces and throat) stainless steel.</p> <p>Available in either single or double rabbet construction. Prepped for a wide variety of hardware options.</p>

### I Finishes



Swirled



Satin



Bead-Blasted



Sanded




Mirror



Non-Directional

### I Vision Panel and Louver Options


Factory installed vision panels and louvers ensure proper glazing materials are used to conform with fire and safety building codes.

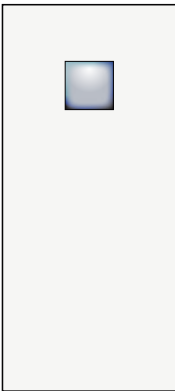


Vision Panel  
10" x 10"  
254 x 254 mm




Vision Panel  
24" x 30"  
610 x 762 mm

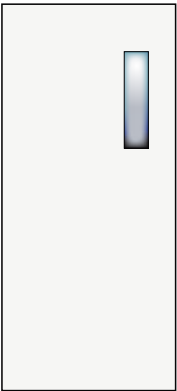


Vision Panel  
5" x 20"  
127 x 508 mm

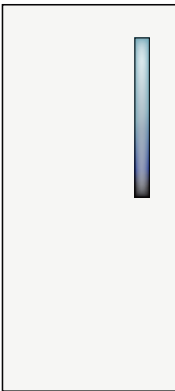

Vision Panel  
3" x 33"  
76.2 x 838 mm

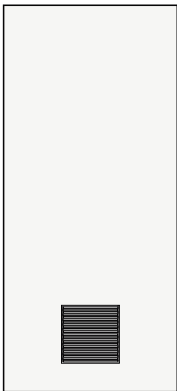

Louvre Panel  
12" x 12"  
305 x 305 mm

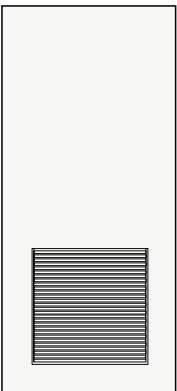

Louvre Panel  
24" x 24"  
610 x 610 mm

## 2.3

### Pedestrian Doors

# STRONGDOR™

FRP Series

## Key Features

- Fiberglass-Reinforced Pebble-Grain Panel
- Aluminum-Reinforced Perimeter Stiles and Rails
- Mitered Corner Joints Secured By Angled Blocks
- Thermally-Insulated Urethane Core Material
- UL-Certified Fire-Rated Door Frame

## Major Benefits

- **Exceptional Durability:**  
Withstands heavy traffic, abuse and vandalism as well as harsh environmental conditions with ease.
- **Low Maintenance:**  
Scratch and stain-resistant pebble-grain exterior looks great for years, requiring only soap and water to clean.
- **Application-Specific:**  
An informed choice for challenging environments such as public buildings and service entrances that are prone to damage.





PRODUCT OVERVIEW

Get A Quote Now!

General Specifications

Custom Sizes	Up to 80" (2032 mm) x 216" (5486 mm)
Face Sheets	Resistant to dents, scratches, scuffs, paint, ink and fading.
Foam	5 lbs per cubic foot density.
Stiles and Rails	Configured for maximum strength.
Urethane Core	Ensures impact resistance, flexural strength and thermal insulation.
Thickness	1 3/4" (44.5 mm) thick

Colors & Finishes



Black



Bronze



Dark Gray



Grey




Cream



White



Red



Wine




Light Grey



Sand




Blue



Brown

Vision Panel and Louver Options


Factory installed vision panels and louvers ensure proper glazing materials are used to conform with fire and safety building codes.

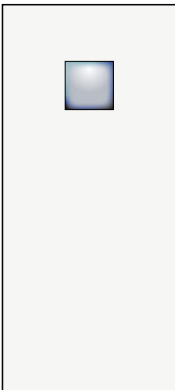


Vision Panel  
10" x 10"  
254 x 254 mm




Vision Panel  
24" x 30"  
610 x 762 mm

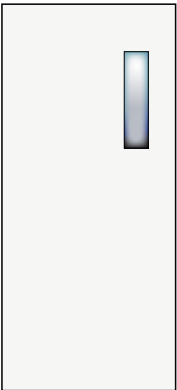


Vision Panel  
5" x 20"  
127 x 508 mm

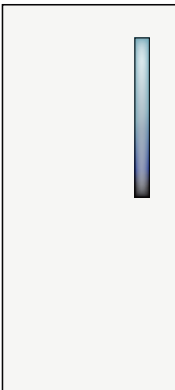

Vision Panel  
3" x 33"  
76.2 x 838 mm

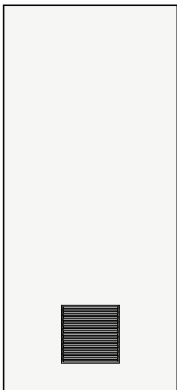

Louvre Panel  
12" x 12"  
305 x 305 mm

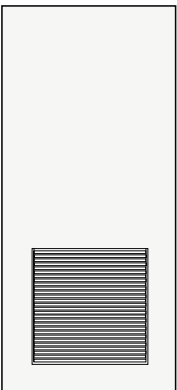

Louvre Panel  
24" x 24"  
610 x 610 mm

# STRONGDOR™

Hollow Metal Series

## Key Features

- Corrosion-Resistant Double-Sided Powder-Coated Panel
- Rugged Perimeter Channel Construction
- Custom Locking Systems and Exit Hardware
- Polystyrene or Polyurethane Core
- UL-Certified Fire-Rated Door Frame

## Major Benefits

- Advanced Performance:**  
Innovative interior-exterior powder-coated protective barrier prevents rust and corrosion better than any alternative in its class.
- Reliable Efficiency:**  
Insulated polystyrene or polyurethane cores deliver effective thermal retention and increased energy savings.
- Proven Security:**  
Fire-rated powder-coat steel construction safely meets the demands of high-volume entry or egress across any application.





### General Specifications

Material	<ul style="list-style-type: none"><li>• 18 gauge (1.6 mm) galvanize steel (16 gauge available)</li><li>• Polystyrene core has a nominal density of 1.0 #ft3, an R-value of 7.12, and a panel U-factor of 0.14.</li><li>• Polyurethane core has a nominal density of 2.0 #ft3, an R-value of 11.01, and a panel U-factor of 0.091.</li></ul>
Durability	<ul style="list-style-type: none"><li>• Powder coating provides superior weatherability. TGIC-free polyester powder coatings across a broad range of 186 colors.</li><li>• Doors can be fire rated for up to 3 hours</li></ul>
Door Size	For use with 1 3/4" (45mm) doors.
Silencer Holes	Prepared for 9/32" (7.1mm) silencer holes.
Custom Jamb Sizes	From 4 1/2" (114mm) up to 12 3/4" (234mm), with 1/8" (3.18mm) increments.
Paint Retention	Excellent paint adhesion characteristics.
Maintenance	Requires minimal Maintenance
Code Compliant	Conforms to ASTM A-653, A653M specifications with A40 coating classification.

### Colors & Finishes

#### Standard Colors




#### Special Colors\*




\*186 colors available in full gloss and satin sheens. Ask dealer about custom color options.  
\*Special colors may have an additional fee.

### Vision Panel and Louver Options

Factory installed vision panels and louvers ensure proper glazing materials are used to conform with fire and safety building codes.

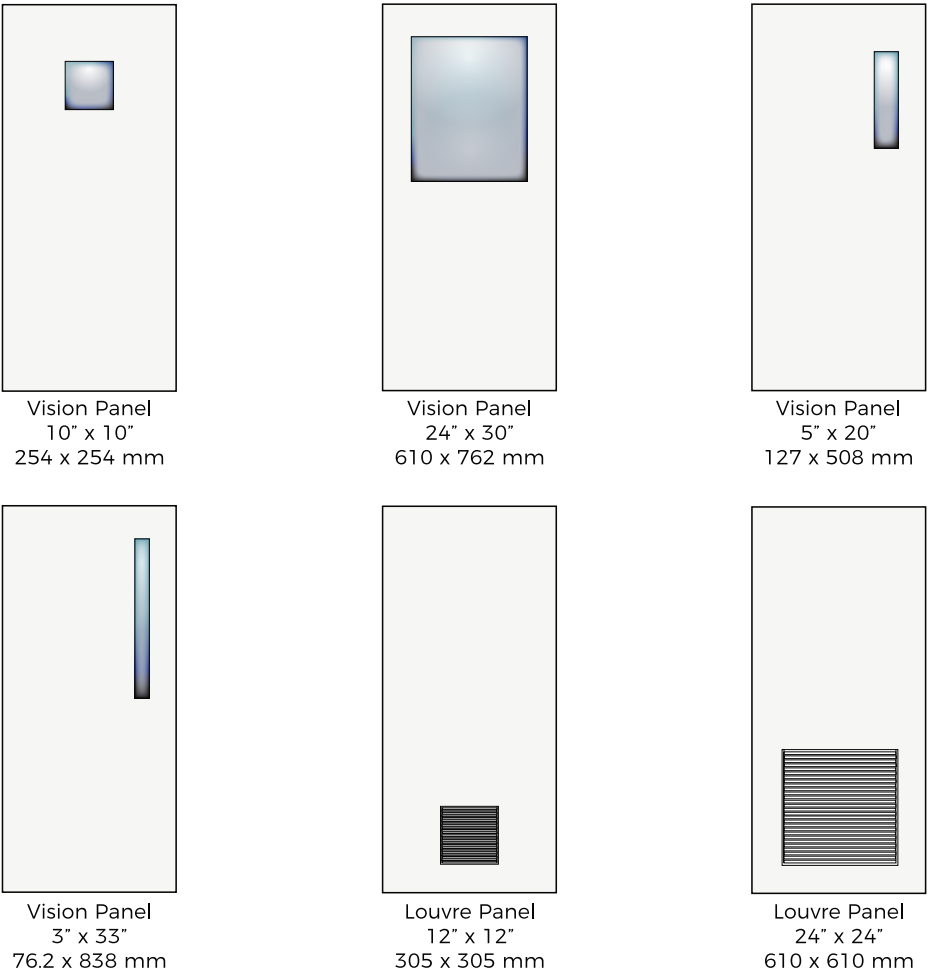

## 3.0 **Keeping Your Facilities In Full-Swing**

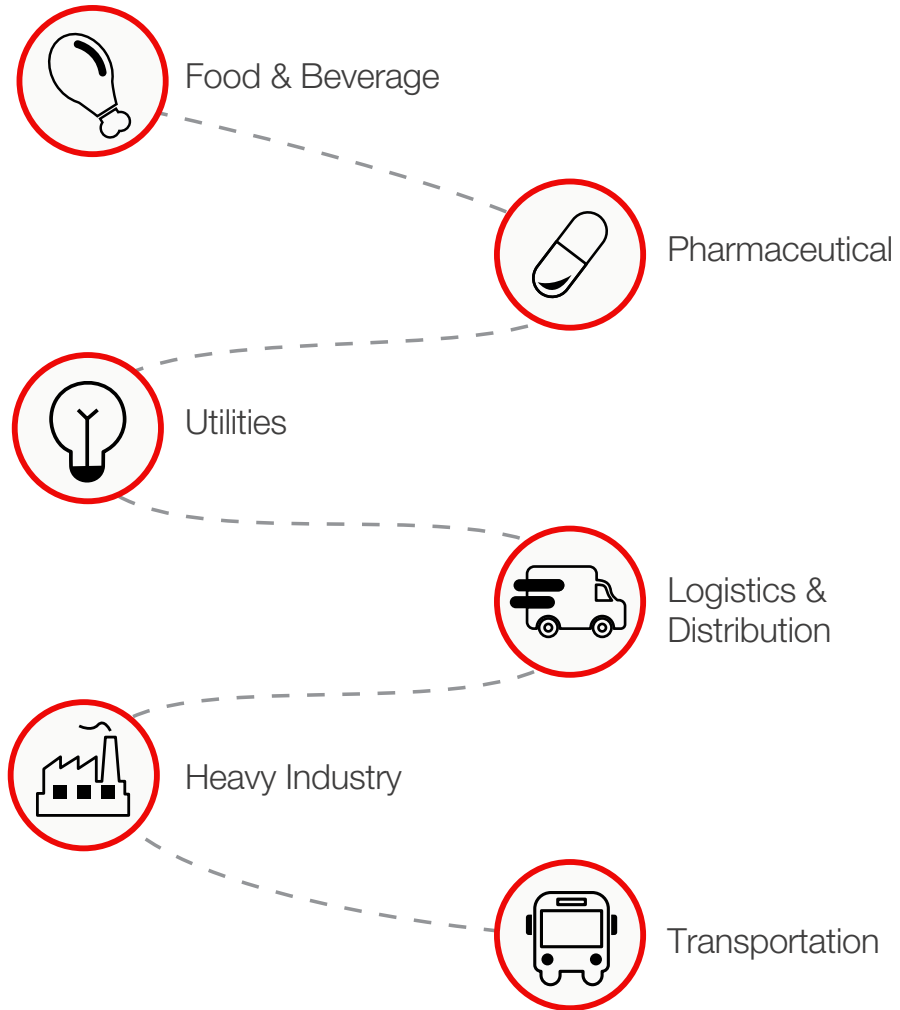

# ALLMARKDOOR

All Doors. All Docks. All Service. All the Time.



**Contact Us Today:**

1.800.417.9995 | [WWW.ALLMARKDOORS.COM](http://WWW.ALLMARKDOORS.COM)